

SET-UP SHEET

XRAY 808

RACE			
TRACK			
NAME			
CITY / COUNTRY			
CONTACT			
DATE			
TEMPERATURE / °F or °C	AIR	TRACK	
LAPS	FINAL POSITION	BEST LAP TIME/sec	RACE LENGTH/min.

TRACK SIZE	☐ OPEN	☐ MEDIUM	☐ TIGHT
TRACK TRACTION	☐ HIGH	☐ MEDIUM	☐ LOW
TRACK SURFACE	☐ SMOOTH	☐ MEDIUM	☐ BUMPY
TRACK TYPE	☐ HARD PACKED	☐ SOFT DIRT	☐ CLAY
	☐ BLUE GROOVE	☐ ASTRO TURF	☐ GRASS
TRACK CONDITION	☐ DRY	☐ DUSTY	☐ WET
	☐ MUD		

DIFFERENTIALS		
TYPE		
FRONT	CENTER	REAR
DIFFERENTIAL - OIL		

GEARING			
CLUTCH BELL		SPUR GEAR	
	T		T
PINION		CROWN GEAR	
	T		T
SPRING		SHOE	

FRONT	SHOCKS	REAR
#358182 C = 0.65	WHITE ☐	#358282 C = 0.47
#358183 C = 0.70	GREY ☐	#358283 C = 0.50
#358184 C = 0.75	SILVER ☐	#358284 C = 0.53
#358185 C = 0.80	GREY-BLUE ☐	#358285 C = 0.57
#358186 C = 0.86	BLUE ☐	#358286 C = 0.61
#358187 C = 0.92	VIOLET ☐	#358287 C = 0.65
#358188 C = 0.98	PURPLE ☐	#358288 C = 0.70
	OTHER	
	OIL / cST	
	REBOUND /%	
 1.3 mm ☐	PISTONS HOLES SIZE	 1.3 mm ☐
1.4 mm ☐		1.4 mm ☐
1.5 mm ☐		1.5 mm ☐
	OTHER	

FRONT	ANTI ROLL BAR	REAR
	THICKNESS / mm	
FRONT	TIRES	REAR
	TYPE	
	INSERTS	
	WHEELS	

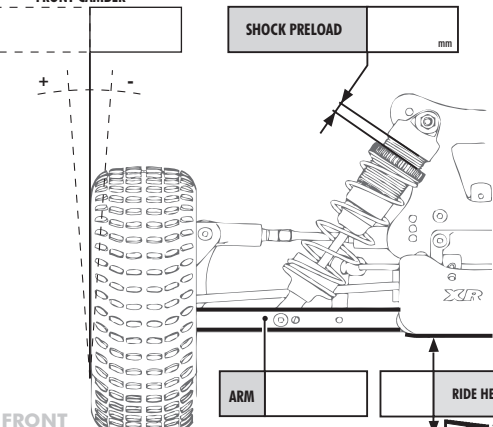
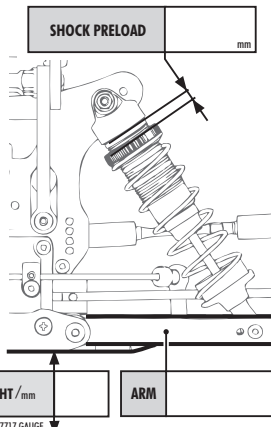
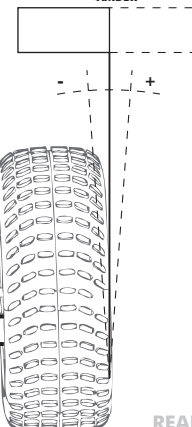
ENGINE	
TYPE	
MANIFOLD	
MUFLER	
PLUG	
FUEL	

BODY	
TYPE	

FRONT		REAR	
STEERING BLOCK PLASTIC ☐ ALU ☐		UPPER SHOCK POSITION UPPER ☐ LOWER ☐	
CASTER BLOCK PLASTIC ☐ ALU ☐		UPPER SHOCK POSITION UPPER ☐ LOWER ☐	
OFFSET STANDARD ☐ +1 ☐ +2 ☐		UPRIGHT PLASTIC ☐ ALU ☐	
FRONT DROOP MEASURE UNDER WHEEL AXLE		REAR DROOP MEASURE UNDER WHEEL AXLE	

FRONT	REAR
KICK-UP	WING MOUNTING LEFT = RIGHT F3 F4 R3 R4 F1 F2 R1 R2
CASTER 10° ☐ 12° ☐ 14° ☐	WING SHIM YES ☐ NO ☐
BRACE PLASTIC ☐ ALU ☐ TORQUE ☐	ANTI-SQUAT
WHEELBASE SHIM POSITION 0mm ☐ 2mm ☐ 2+2mm ☐	WHEELBASE SHIM POSITION 0mm ☐ 2mm ☐ 2+2mm ☐

FRONT	REAR
FRONT TOE OUT ☐ IN ☐	REAR TOE OUT ☐ IN ☐
SERVO SAVER TIGHT ☐ MEDIUM ☐ SOFT ☐	WHEELBASE 0mm ☐ 1mm ☐ 2mm ☐ 3mm ☐ 4mm ☐
BUMP STEER mm	ANTI-ROLL BAR POSITION

FRONT CAMBER	SHOCK PRELOAD	REAR CAMBER
		
ARM	SHOCK PRELOAD	ARM
FRONT	SHOCK PRELOAD	REAR

COMMENTS